

Features

- APD with 0.008 mm² active area
- Optimized for 550 nm to 750 nm
- Very high sensitivity
- High cut-off frequency
- Ultra low temperature coefficient

Description

Circular active area APD chip with 100 μm diameter. Ceramic carrier type non hermetic SMD package with clear glass or filter window. Reflow solderable.

Application

- Laser range finder
- High speed photometry
- High speed optical communications
- Medical equipment

RoHS


2002/95/EC




Absolute maximum ratings

| Symbol | Parameter | Min | Max | Unit |
|-------------------|-------------------------------|-----|------|------|
| T _{STG} | Storage temp | -40 | 100 | °C |
| T _{OP} | Operating temp | -20 | 70 | °C |
| M _{max} | Gain (I _{PO} = 1 nA) | 200 | | |
| I _{PEAK} | Peak DC current | | 0.25 | mA |

Spectral response (M = 100)

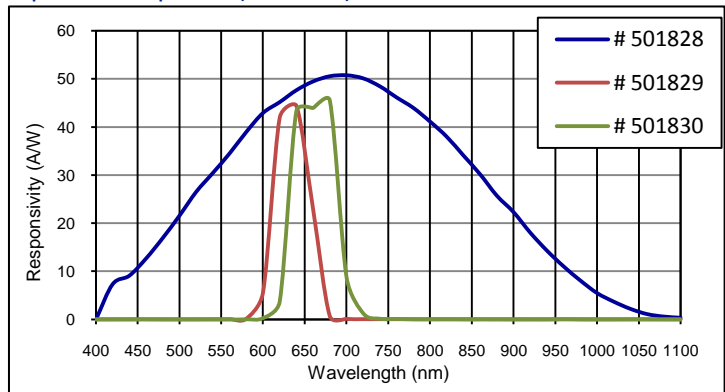

Schematic

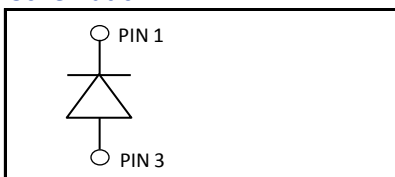

Electro-optical characteristics @ 23 °C

| Symbol | Characteristic | Test Condition | Min | Typ | Max | Unit |
|-----------------|---------------------------|--|--------------|------|-----|-----------------|
| | Active area | | diameter 100 | | | μm |
| | Active area | | 0.0078 | | | mm ² |
| I _D | Dark current | M = 100 | | 0.05 | 0.5 | nA |
| C | Capacitance | M = 100 | | 0.5 | | pF |
| | Responsivity | Order # 501828 ; M = 100; λ = 660 nm | 45 | 50 | | A/W |
| | Responsivity | Order # 501829 ; M = 100; λ = 635 nm | 40 | 44 | | A/W |
| | Responsivity, preliminary | Order # 501830 ; M = 100; λ = 650 nm | 40 | 44 | | A/W |
| t _R | Rise time | M = 100; λ = 660 nm; R _L = 50 Ω | | 0.12 | | ns |
| | Cut-off frequency | -3dB, phase shift mode | | 3 | | GHz |
| V _{BR} | Breakdown voltage | I _R = 2 μA, V _{BR} - binning available | 60 | 90 | 120 | V |
| | Temperature coefficient | Change of V _{BR} with temperature | | 0.2 | | V/K |
| | Excess noise factor | M = 100 | | 2.0 | | |
| | Excess noise index | M = 100 | | 0.15 | | |

European, International Sales:




First Sensor AG
 Peter-Behrens-Strasse 15
 12459 Berlin
 Germany
 T +49 30 6399 2399
 F +49 30 639923-752
 sales.opto@first-sensor.com

USA:




First Sensor Inc.
 5700 Corsa Avenue #105
 Westlake Village
 CA 91362 USA
 T +1 818 706 3400
 F +1 818 889 7053
 sales.us@first-sensor.com


Quantum efficiency (23 °C)

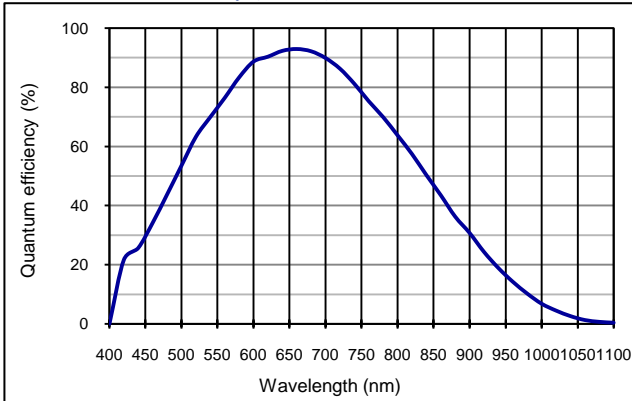


Capacitance as fct of reverse bias (23 °C)

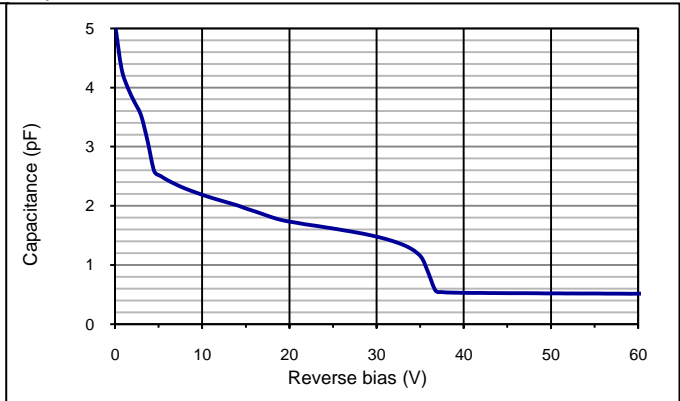

Multiplication as fct of bias (23 °C)

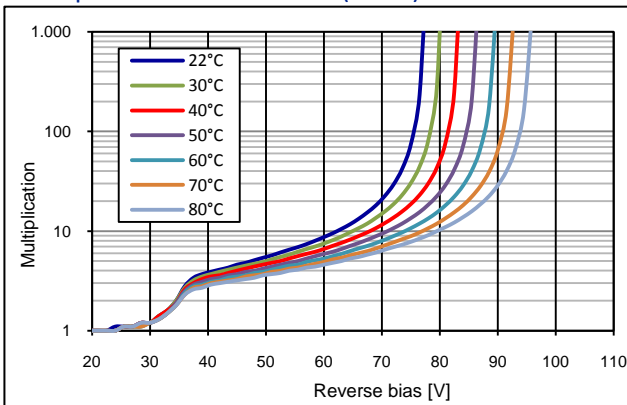


Dark current as fct of bias (23 °C)

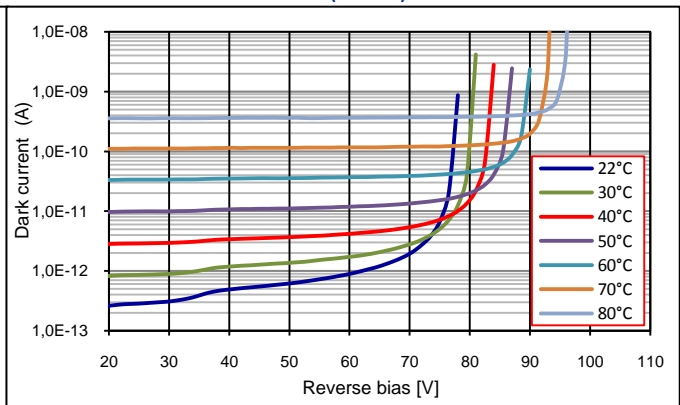

Order # 501829:


Typ. filter characteristics (center 635 nm)

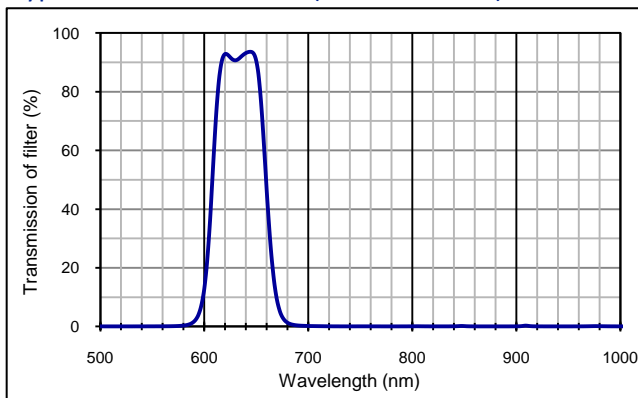

full filter specification upon request

Order # 501830:

Typ. filter characteristics (center 650 nm)

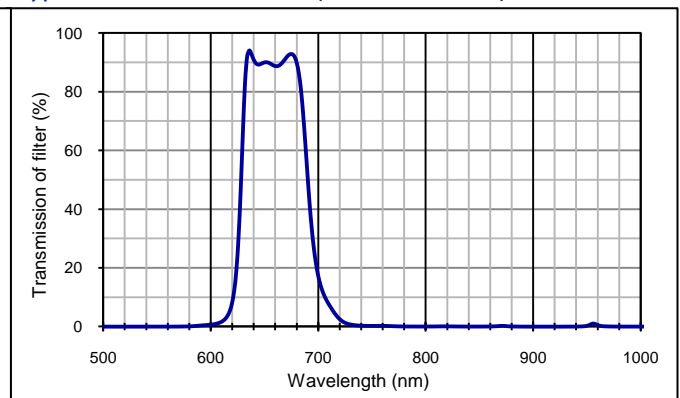

full filter specification upon request

European, International Sales:




First Sensor AG
 Peter-Behrens-Strasse 15
 12459 Berlin
 Germany
 T +49 30 6399 2399
 F +49 30 639923-752
 sales.opto@first-sensor.com

USA:




First Sensor Inc.
 5700 Corsa Avenue #105
 Westlake Village
 CA 91362 USA
 T +1 818 706 3400
 F +1 818 889 7053
 sales.us@first-sensor.com

Technical Drawing, Package: LCC6.1

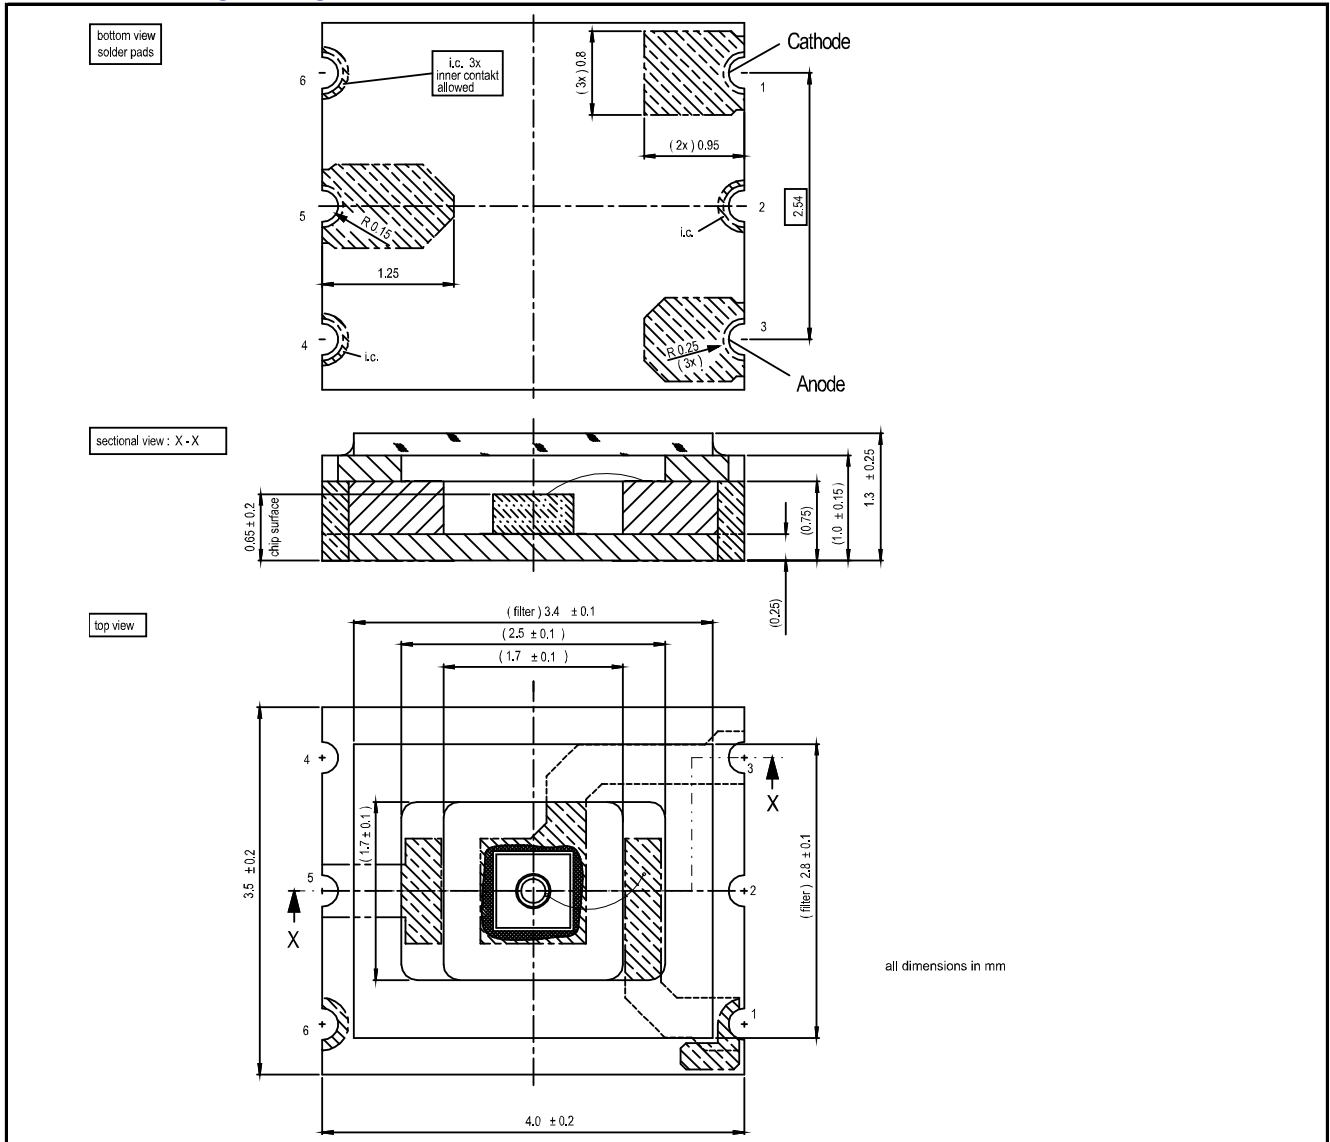

Application hints:

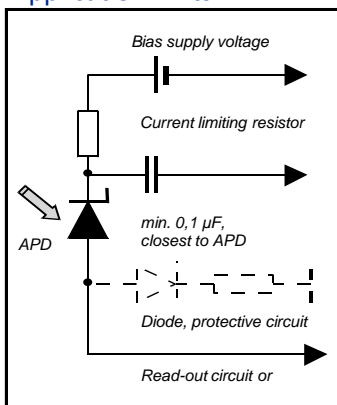

- Current should be limited by a protecting resistor or current limiting - IC inside the power supply
- For low light level applications blocking of ambient light should be used
- For high gain applications bias voltage should be temperature compensated
- Please consider basic ESD protection while handling
- Use low noise read-out - IC
- For further questions please refer to document "Instructions for handling and processing"

European, International Sales:




First Sensor AG
 Peter-Behrens-Strasse 15
 12459 Berlin
 Germany
 T +49 30 6399 2399
 F +49 30 639923-752
 sales.opto@first-sensor.com

USA:




First Sensor Inc.
 5700 Corsa Avenue #105
 Westlake Village
 CA 91362 USA
 T +1 818 706 3400
 F +1 818 889 7053
 sales.us@first-sensor.com

Package dimension, large quantities on reel

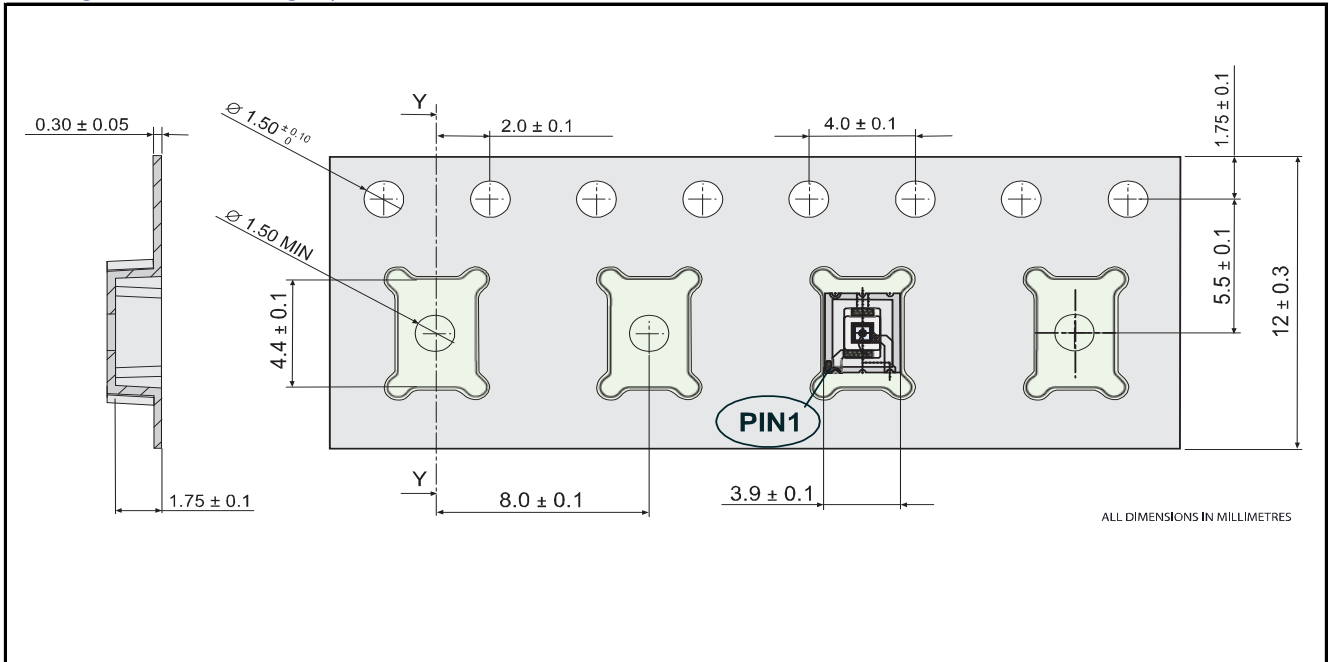

Package dimension, small quantities in trays

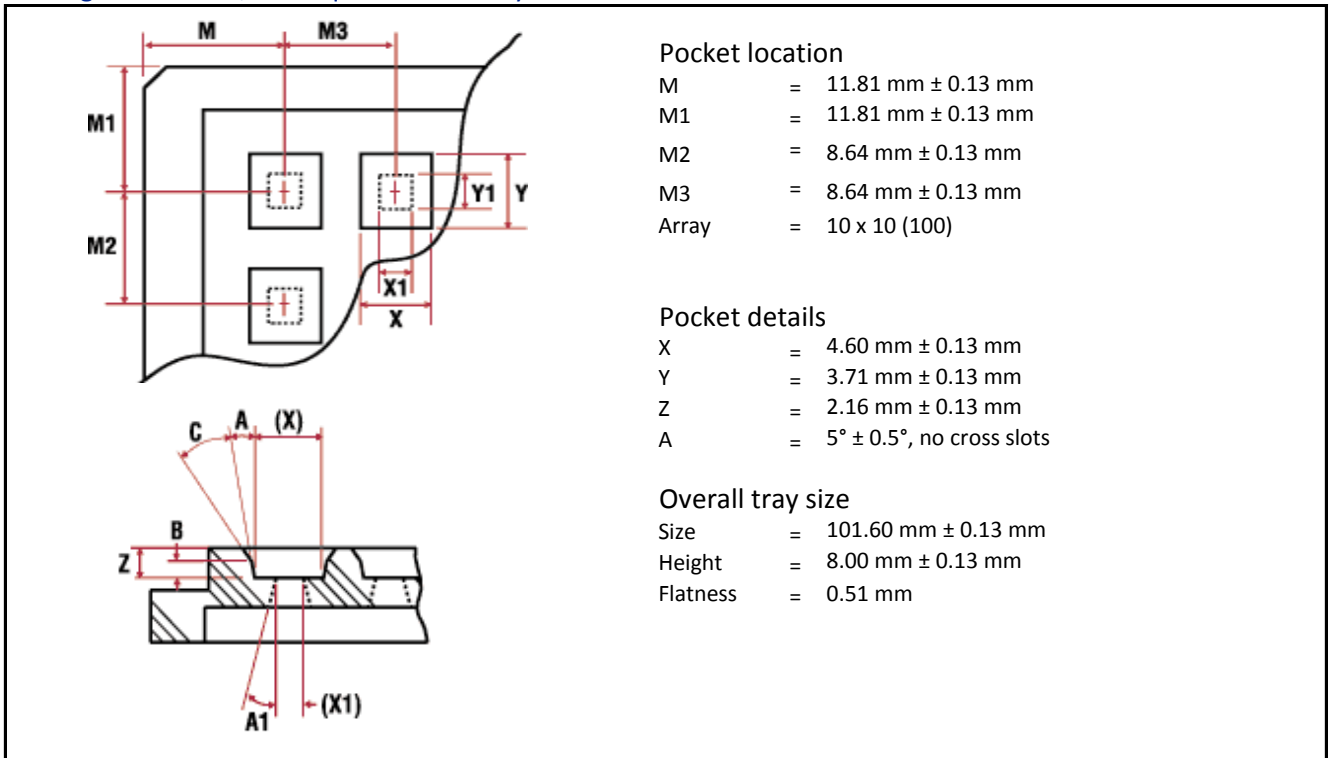

Disclaimer: Due to our strive for continuous improvement, specifications are subject to change within our PCN policy according to JESD46C.

European, International Sales:



First Sensor AG
 Peter-Behrens-Strasse 15
 12459 Berlin
 Germany
 T +49 30 6399 2399
 F +49 30 639923-752
 sales.opto@first-sensor.com

USA:



First Sensor Inc.
 5700 Corsa Avenue #105
 Westlake Village
 CA 91362 USA
 T +1 818 706 3400
 F +1 818 889 7053
 sales.us@first-sensor.com