
Features

- 100 mm² PIN detector
- Light blocking aluminum layer
- Low dark current
- High sensitivity

Description

Square active area PIN photodiode with 100 mm² active area. Ceramic carrier type LCC10 package with light blocking aluminum layer. Reflow solderable. Non-hermetic.

Application

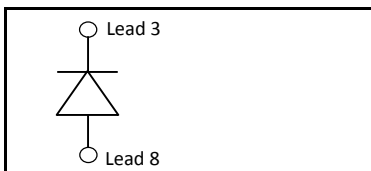
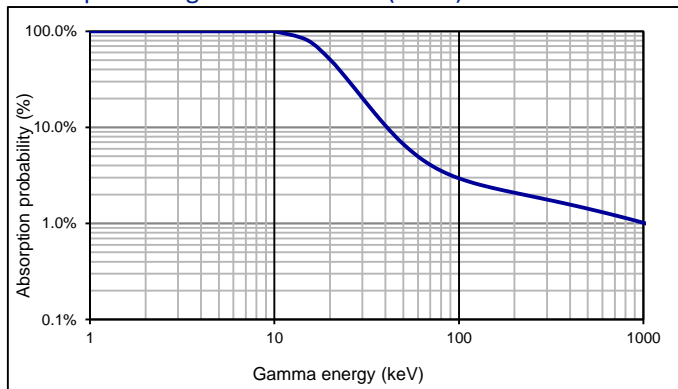
- Ionizing radiation detector
- Medical equipment
- Personal dosimeter

RoHS

2002/95/EC


Absolute maximum ratings

Symbol	Parameter	Min	Max	Unit
T _{STG}	Storage temp	-40	100	°C
T _{OP}	Operating temp	-20	70	°C
V _{max}	Max reverse voltage		50	V
I _{PEAK}	Peak DC current		10	mA

Schematic

Absorption of gamma radiation (23 °C)

Electro-optical characteristics @ 23 °C

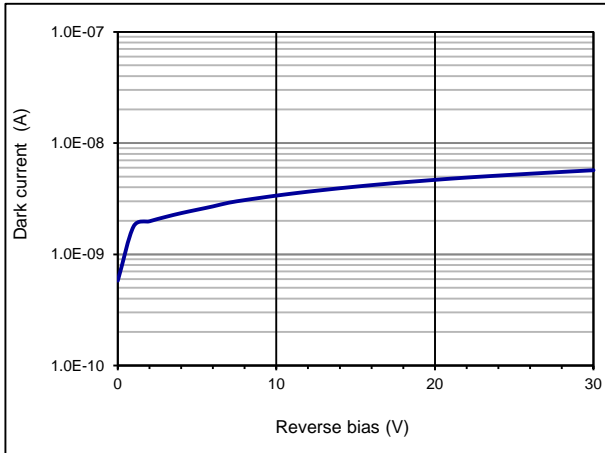
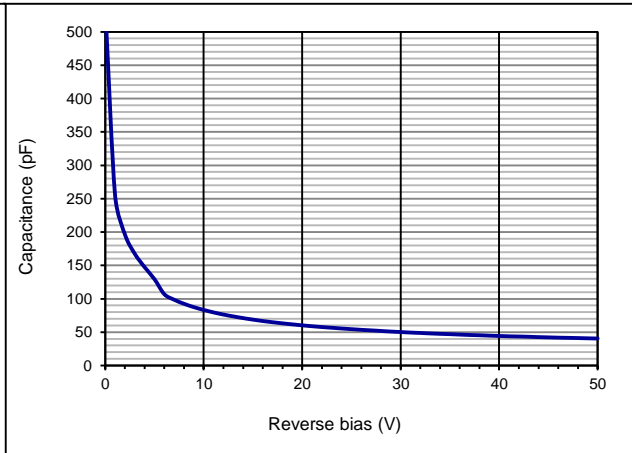
Symbol	Characteristic	Test Condition	Min	Typ	Max	Unit
	Active area			10 x 10		mm
	Active area			100		mm ²
	Detectable radiation	Gamma radiation	1		1000	keV
	Count rate Cs-137	V _R = 10 V		65		cpm / μSv/h
I _D	Dark current	V _R = 10 V		5	10	nA
C	Capacitance	V _R = 0 V; f = 10 kHz		500		pF
		V _R = 10 V; f = 10 kHz	65	90	100	pF
t _R	Rise time	V _R = 10 V; E = 10 keV; R _L = 50 Ω			2000	ns
	Shunt Resistance	V _R = 10 mV		25		MΩ
V _{BR}	Breakdown voltage	I _R = 2 μA	50	80		V

European, International Sales:


First Sensor AG
 Peter-Behrens-Strasse 15
 12459 Berlin
 Germany
 T +49 30 6399 2399
 F +49 30 639923-752
 sales.opto@first-sensor.com

USA:


First Sensor Inc.
 5700 Corsa Avenue #105
 Westlake Village
 CA 91362 USA
 T +1 818 706 3400
 F +1 818 889 7053
 sales.us@first-sensor.com

Dark current (23 °C)

Capacitance as fct of reverse bias (23 °C)

Package dimension:

Small quantities: Foam pad, boxed (12 cm x 16.5 cm)

Handling:

Please refer to document "Instructions for handling and processing"

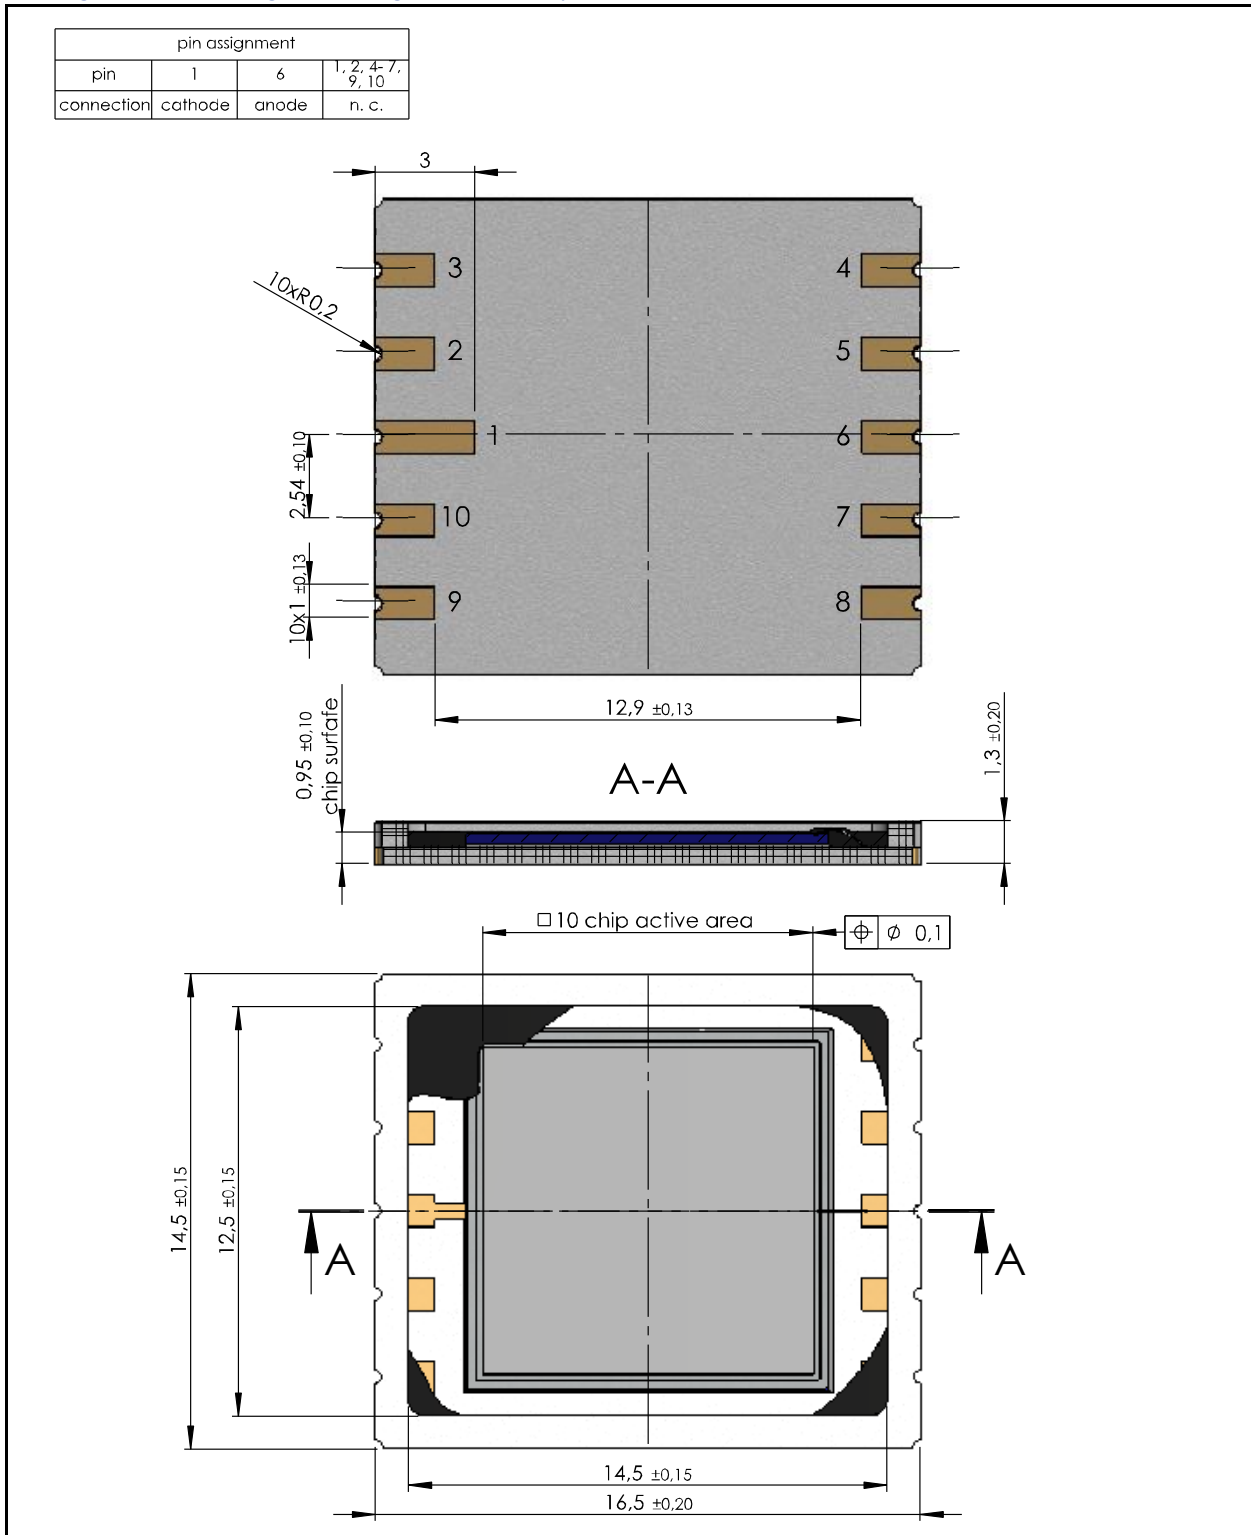
Please be aware that the aluminum layer on the chip surface is very thin and can be damaged easily.

European, International Sales:

 First Sensor AG
 Peter-Behrens-Strasse 15
 12459 Berlin
 Germany
 T +49 30 6399 2399
 F +49 30 639923-752
 sales.opto@first-sensor.com

USA:

 First Sensor Inc.
 5700 Corsa Avenue #105
 Westlake Village
 CA 91362 USA
 T +1 818 706 3400
 F +1 818 889 7053
 sales.us@first-sensor.com

Package: LCC10 with light blocking aluminium layer


Disclaimer: Due to our strive for continuous improvement, specifications are subject to change within our PCN policy according to JESD46C.

European, International Sales:


First Sensor AG
 Peter-Behrens-Strasse 15
 12459 Berlin
 Germany
 T +49 30 6399 2399
 F +49 30 639923-752
 sales.opto@first-sensor.com

USA:


First Sensor Inc.
 5700 Corsa Avenue #105
 Westlake Village
 CA 91362 USA
 T +1 818 706 3400
 F +1 818 889 7053
 sales.us@first-sensor.com